

SB-600 series

UB-610 / 620 / 635

Next generation standards of personal hygiene

ultra sonic soldering water-proof seat



occupied seat sensor



built-in pump motor



Heated seat



warm air dryer



Uspa



Functions




Features



Dimension

* Uspa SB-600 series may not fit certain toilet bowl designs. Please refer to the dealer sizing and installation chart.

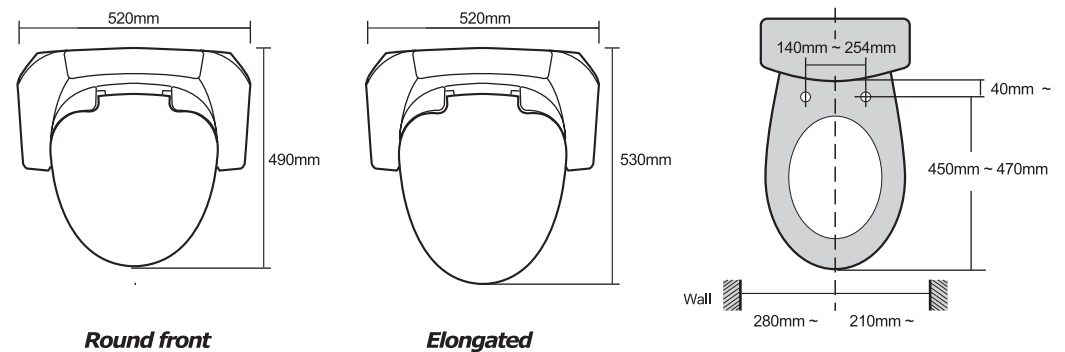

Specifications

SB-610L / SB-620L / SB-635L Elongated Model SB-610S / SB-620S / SB-635S Round front Model

Power rating	120V, 60Hz, 600W / 230V, 50Hz, 730W
Power cord	1.2m (120V) / 1.8m (230V)
Cleansing features	Posterior wash : 1,000 ± 200 ml / min Feminine wash : 1,000 ± 200 ml / min Tank capacity : 1.0 L Water temperature : Room temp ~ 40°C (104°F) Heater capacity : 500W (120V) / 655W (230V)
Dry features (SB-620, 635 only)	Air temperature : Room temp ~ 50°C (140°F) Heater capacity : 500W (120V) / 525W (230V) Safety feature : Bi-metal, Thermal cut-off
Heated seat features	Seat temperature : Room temp ~ 40°C (104°F) Heater capacity : 55W (120V) / 70W (230V) Safety feature : Thermal cut-off Catalytic filter
Air purity feature (SB-635 only)	
Water supply pressure	0.05mPa ~ 0.74mPa (10psi ~ 106psi)
Circuit breaker	Within 15mA 0.1 second
Net weight	5.3kg (elongated), 5.0kg (round front) / 11.7 lbs (elongated) / 11.0lbs (round front)

* Specifications can be changed without notice.

* Recommended water supply pressure is between 14psi ~ 100psi (0.09mPa ~ 0.68mPa).



manufactured by
SAMHONGTECH CO., LTD.

1488-7, WOJUNG TOWN 9F, KWANYANG-DONG
DONGAN-KU, ANYANG-CITY, GYEONGGI-DO
REP OF KOREA 431-060
Tel : +82-31-420-2341~5 Fax : +82-31-426-8666
http://www.samhongtech.co.kr

distributed by