

# UB-2200 series

UB-2210 / 2220 / 2235

Next generation standards of personal hygiene

two separated nozzles



aerated gentle wash



ultra sonic soldering water-proof seat



intelligent occupied seat sensor



nano-silver technology




Uspa



## Functions




## Features

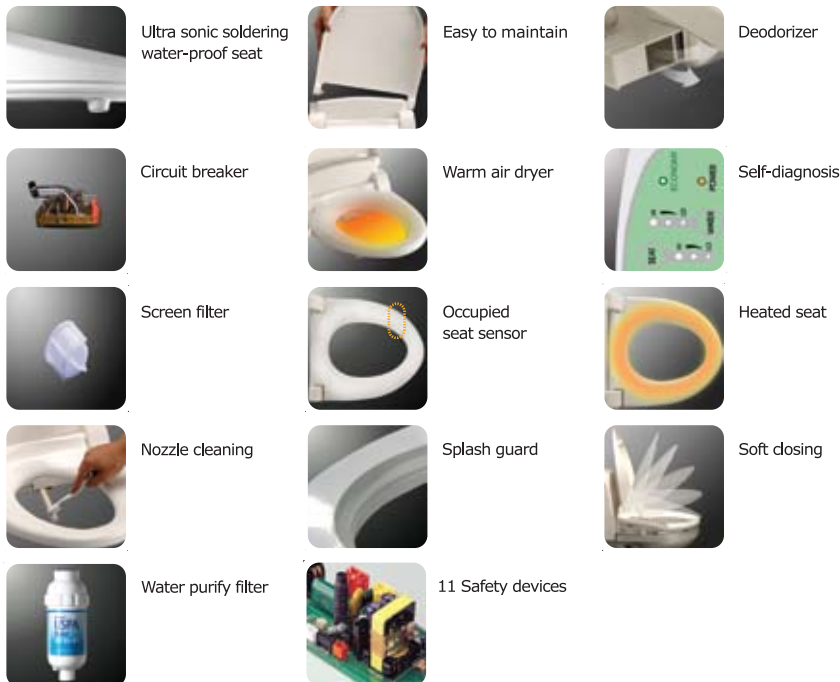

## Dimension

\* Uspa UB-2200 series may not fit certain toilet bowl designs. Please refer to the dealer sizing and installation chart.

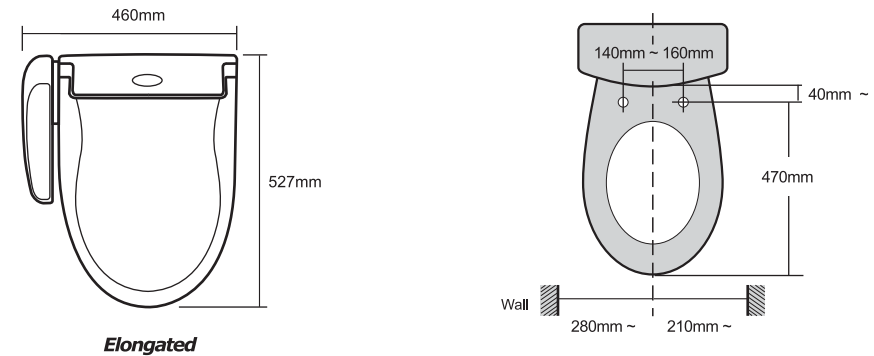

## Specifications

### UB-2210 / UB-2220 / UB-2235 Elongated Model

Power rating	120V, 60Hz, 660W / 230V, 50Hz, 735W
Power cord	1.2m (120V) / 1.8m (230V)
Cleansing features	Posterior wash : 1,000 ± 200 ml / min Feminine wash : 1,000 ± 200 ml / min Tank capacity : 1.3l Water temperature : Room temp ~ 104°F (40°C) Heater capacity : 600W (120V) / 655W (230V) Safety features : Thermal cut-off, Thermostat(bi-metal), Floating switch
Dry features (UB-2220, 2235 only)	Air temperature : Room temp ~ 140°F (60°C) Heater capacity : 250W (120V) / 275W (230V) Safety feature : Bi-metal, Thermal cut-off
Heated seat features	Seat temperature : Room temp ~ 104°F (40°C) Heater capacity : 55W (120V) / 60W (230V) Safety feature : Thermal cut-off Catalytic filter
Air purity feature (UB-2235 only)	
Water supply pressure	10psi ~ 106psi (0.08mPa ~ 0.74mPa)
Circuit breaker	Within 15mA 0.1 second
Net weight	10.8 lbs (4.7kg)

\* Specifications can be changed without notice.

\* Recommended water supply pressure is between 14psi ~ 100psi(0.09mPa ~ 0.68mPa).



manufactured by  
**SAMHONGTECH CO., LTD.**

1488-7, WOOJUNG TOWN 9F, KWANYANG-DONG  
DONGAN-KU, ANYANG-CITY, GYEONGGI-DO  
REP OF KOREA 431-060  
**Tel : +82-31-420-2341~5 Fax : +82-31-426-8666**  
<http://www.samhongtech.co.kr>

distributed by